

A12



Standard equipment

A12 66T



- 2 x PPL brush Ø 330 mm - 13"

A12 75T



- 2 x PPL brush Ø 360 mm - 14"



- Front squeegee blade L.925 mm Shore 40 Th. 3 mm
- Rear squeegee blade L.1015 mm Shore 30 Th. 4 mm

Technical data:	A12 66T	A12 75T
Code	8.517.0104	8.517.0106
power supply	24 V DC	24 V DC
scrubbing width	660 mm	750 mm
squeegee width	900 mm	900 mm
max working capacity	3762 m ² /h	4275 m ² /h
detergent tank capacity	88 l	88 l
recovery tank capacity	91/95 l	91/95 l
traction	300W/automatic	300W/automatic
vacuum motor	1733 mmH ² O/550W	1733 mmH ² O/550W

A12

- Capable to work for the maintenance and deep cleaning of large areas (up to 2.600 m²)
- User friendly control panel: forward speed setting, scrubbing and vacuuming selectors, battery charge indicator, traction direction indicator, key main switch
- Large handle with traction driving lever for forward and backward directions
- Self levelling brush plate
- Cover removable without tools
- Quick vacuum motor and filter inspection, without tools
- Detergent solution filter
- Detergent solution tank provided with large opening protected by quick locking cap.

Walk-behind floor scrubber driers



Easy access to battery and vacuum motor compartment, without using tools. Large capacity shock and acid proof polyethylene tanks (88 l) avoid frequent refilling and idle time. 4 x 6V -180 Ah C5 batteries


granting continuous working time up to 4-5 hours. Adjustable speed ensures high precision in cleaning congested areas with obstacles. Intuitive controls reduce operator's training time. Safety thermal breakers prevent motor problems



in case of overheating or operator's misuse. Heavy duty V-shaped squeegee ensures perfect drying of every type of floor, even with large joints. Non-marking wheels avoid marks after the drying. Completely adjustable to fit any surface.



Strong mechanical control levers for heavy duty use. Large size drain hose for a fast emptying and a better cleaning of the recovery tank. Quick fitting battery charger plug.

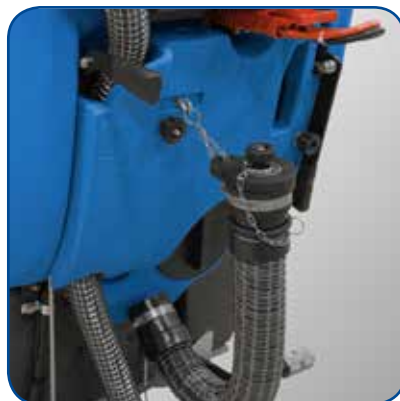

Optional accessories:



- 4 x Tubular battery Pb-acid 6V 180Ah C5



- 4 x GEL Battery 6 MFP 180 6V 180Ah C5



- Battery Charger 24V 25A 220-240/50-60


- On-board Battery charger kit - 24V - 25A



- Polyurethane front blade L.925 TH.3 Sh.40
- Polyurethane rear blade L.1015 TH.4 Sh.40



- Tynex brush Ø 330 mm-13"
- Tynex brush Ø 360 mm-14"
- PPL 0,03 brush Ø 330 mm-13"
- PPL 0,03 brush Ø 360 mm-14"
- PES brush Ø 330 mm-13"
- PES brush Ø 360 mm - 14"



- EWU pad driver Ø 330 mm-13"
- EWU pad driver Ø 360 mm-14"



(5 pcs package)

- Ø 340 mm-13"- beige
- Ø 340 mm-13"- green
- Ø 340 mm-13"- black
- Ø 380 mm-15"- beige
- Ø 380 mm-15"- green
- Ø 380 mm-15"- black

PROFESSIONAL LINE

Lamers Reinigingstechniek B.V.

Ambachtsweg 2
7021 BT ZELHEM
+31 (0)314 623 341
info@lamersequipment.nl